




# TRENT BOSCH TOOLS LASER BARS

## HOW TO POSITION THE LASER

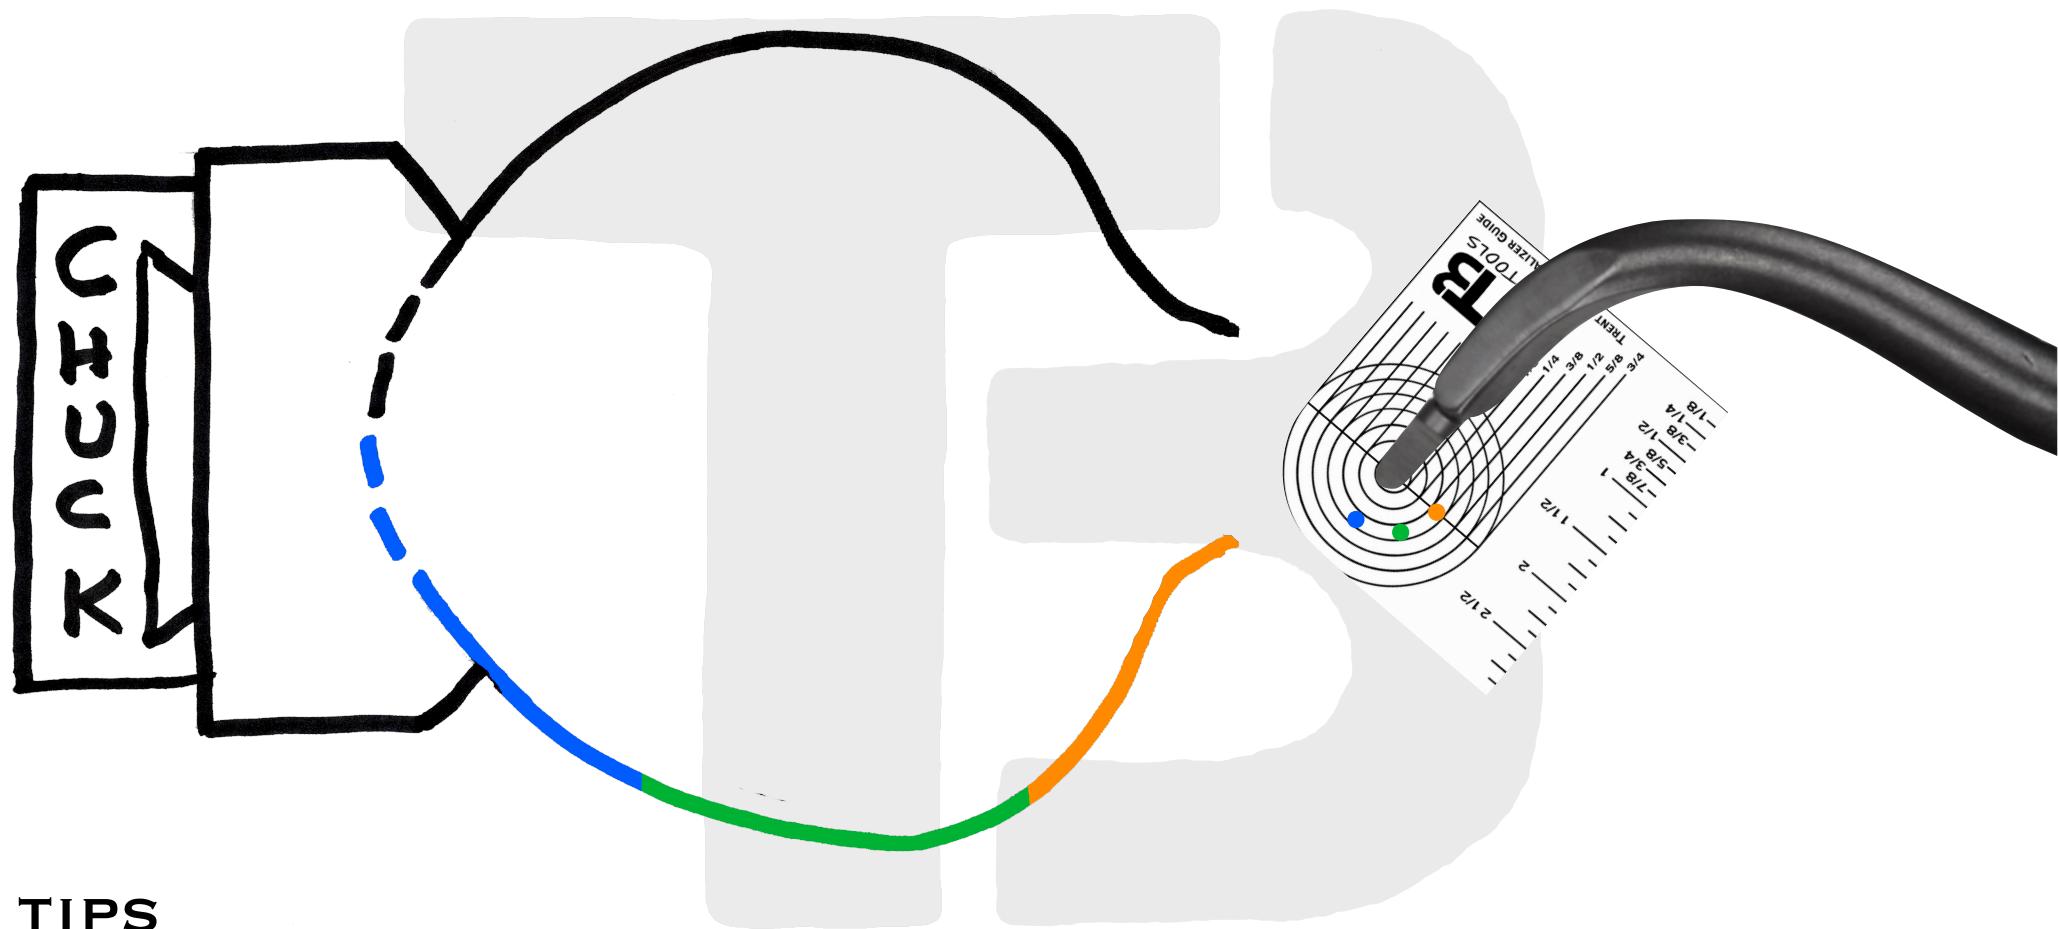

## TIPS

- Make sure that the laser dot and the cutting edge of the tool are perpendicular to the wall of the form. This is why you have to move the placement of the dot several times while hollowing, to achieve a perpendicular reading across the wall.
- This is just an example. The exact position of the laser will always depend on the shape of your form.
- The above dots on the Wall Thickness Gauge are set to a 1/4" thickness. Be sure to set your laser to your desired thickness.